



# Smart Reservoir

**Variable Volume Reservoir**

**Low level sensing pressure switch**




1/8" NPT, SAE-6 or JIC-6

## Low level sensing pressure switch

### Specifications

- SPDT switch 125 Vac/ 1A gold contacts
- Cable M8 connector with mating 2m cable
- Buna N seal & 303 SS body
- Temp range: -65°F to 225°F (-54°C to 107°C)
- Deviation: 2% at < 10° F and > 125°F
- 30 PSI max
- P<sub>set</sub> = 1 PSI decreasing
- Repeatability: ± 0.6 PSIG
- Level sensing: VVR400 = 20%  
VVR800 = 25%  
VVR1300 = 25%

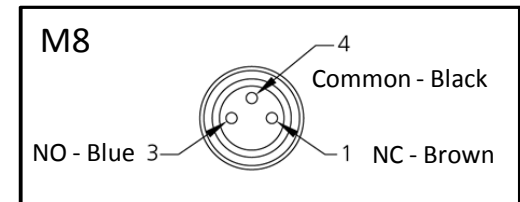

### Installation options

- On top cover with air bleed valve assembly
- On bottom housing auxiliary SAE-16 port

