



Smart Reservoir

Variable Volume Reservoir

Low level sensing pressure switch

LS1M8

Smart Reservoir inc.

812 boul Industriel

Bois-des-Filion, QC

J6Z 4S7, Canada

(450) 965-9669

www.variablevolumereservoir.com




1/8" NPT, SAE-6 or JIC-6

Low level sensing pressure switch

Specifications

- SPDT switch 125 Vac/ 1A gold contacts
- Cable M8 connector with mating 2m cable
- Buna N seal & 303 SS body
- Temp range: -65°F to 225°F (-54°C to 107°C)
- Deviation: 2% at < 10° F and > 125°F
- 30 PSI max
- Pset = 1 PSI decreasing / Reset at 2.5 PSI ↑
- Repeatability: ± 0.6 PSIG
- Level sensing: VVR400 = 20%
VVR800 = 25%
VVR1300 = 25%

Reset at 45% level

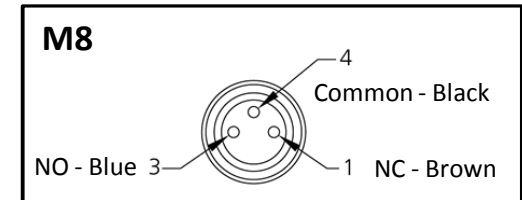

Installation options

- On top cover with air bleed valve assembly
- On bottom housing auxiliary SAE-16 port

